




DRAWERS


Drawer front adjustments

02/2010

SMALL DRAWER

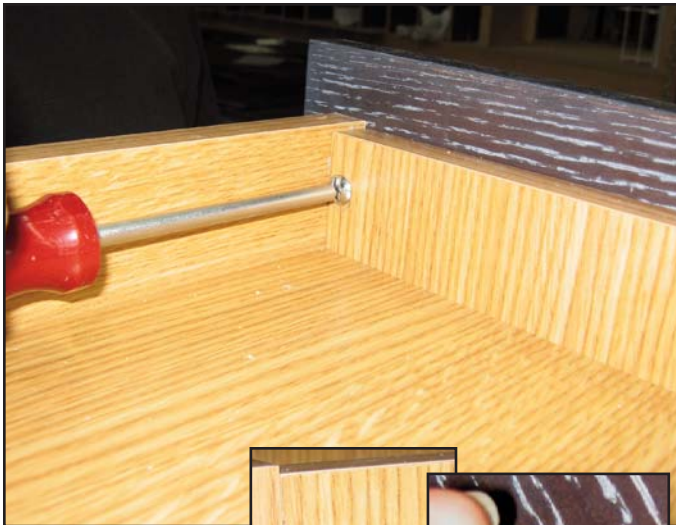

Space adjustment of the drawers and drawer fronts

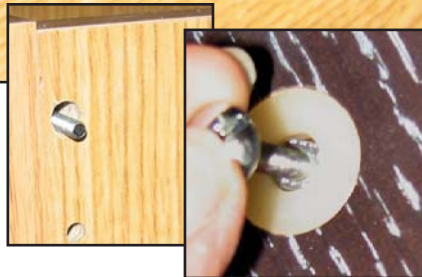

THE DRAWER FRONTS ARE ADJUSTABLE

Drawer fronts are factory-adjusted. However, if an adjustment is required proceed as follow:

SMALL DRAWER

1. Loosen the two screws that attach the drawer front to the drawer box.
2. Adjust the facade horizontally and vertically.
3. Re-tighten the screws to secure the drawer front in the new position.

DEEP DRAWER


SHIPPED BEFORE FEBRUARY 1st 2010

1. Hold the facade and the drawer together and unscrew the two top fastening screws.
2. Partially unscrew the two bottom screws.
3. Adjust the façade horizontally and vertically.
4. Secure the new position by tightening the screws at the bottom of the drawer.
5. To secure the drawer front in the new position, do not use the existing screw holes in the top of the drawer. Screw above or below the existing top holes to fix the drawer front in the new position.

SHIPPED AFTER FEBRUARY 1st 2010

1. Loosen the four screws that attach the drawer front to the drawer box.
2. Adjust the facade horizontally and vertically.
3. Re-tighten the screws to secure the drawer front in the new position.

DEEP DRAWER

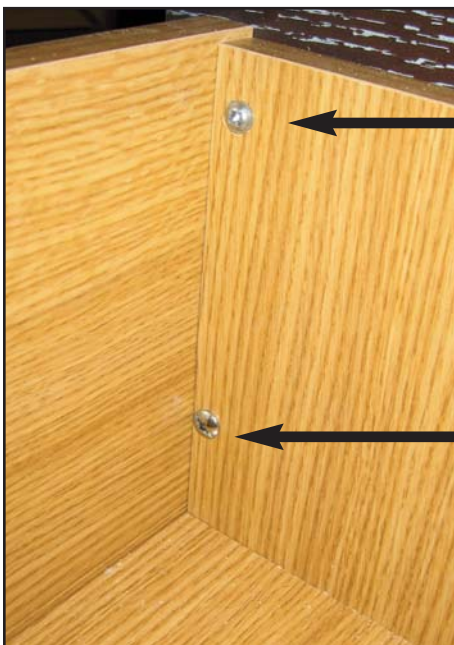

Fastening screw.

Screw for adjustment.