




DRAWERS

with soft-closing mechanism

To remove and replace

(Models after Feb. 2009)


05/2009

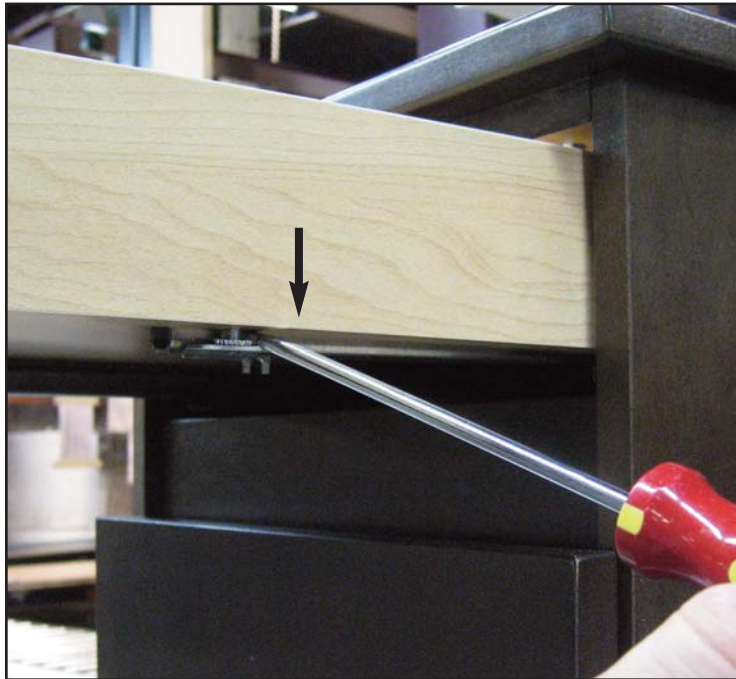

REMOVING THE DRAWERS

In order to maintain the factory adjustments, it is important to **identify the position of each drawer** on the vanity before removing them.

Open the drawer fully, look underneath and using a screw driver, separate the slide from the drawer then, lift the drawer upward and pull it toward you.

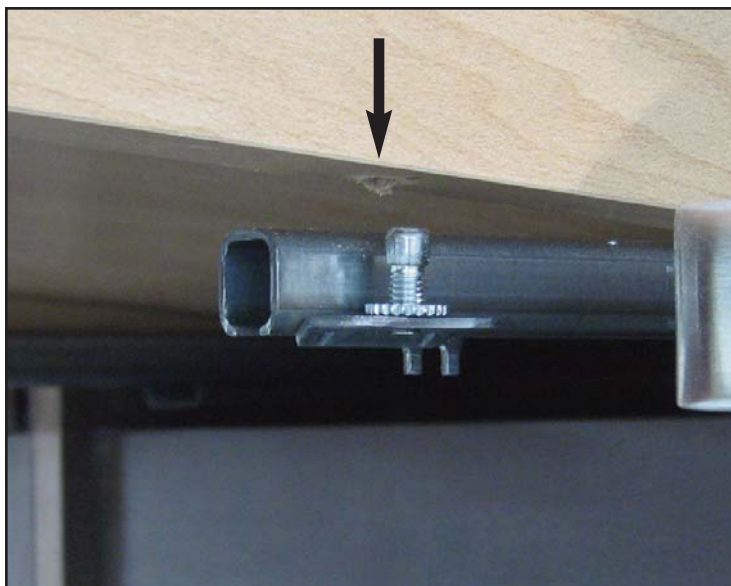

TO REINSTALL DRAWERS

To reinstall the drawers, place the drawer onto the rail, pull the slides toward you to allow the pin to align with the predrilled hole then, insert the pin into the hole.

If an adjustment is necessary, move the serrated washer.